

TGB

Work and Play Different



ATV SAFETY

TGB is serious about safety on ALL ATVs, particularly quad bikes. It is no secret that there have been many fatalities involving quad bikes over the years.

Extensive Independent studies have proven the installation of an approved OPD (Occupant Protection Device) can reduce the chance of fatality by up to 30%. In compliance with the Australian Regulations TGB ATV's (in Australia) will be sold with a compliant OPD as standard equipment.

Argo ATV and TGB Australia supports the concept of a device that will save lives and wish to thank all concerned in particularly QB Industries for their ongoing developments of improving quad bike safety.

42 Years, what this means for you:

You will experience the premium off-road quality, performance and value from this multi award winning TGB all-terrain vehicle. Engineered to meet the highest expectation of an ever-expanding global market.

Established in 1978 TGB quickly became a much sort after manufacturer of quality parts such as shock absorbers, flywheel magnetos and starter motors for companies including Piaggio (The largest Italian manufacturer of scooters). In 1985 TGB began to expand to include the production of their own CVT's and in 1987 TGB introduced their own branded scooter. With an emphasis on high quality TGB very quickly became well received across Europe and the emerging world market. By 1990 TGB had forged such a reputation for outstanding quality in manufacturing they were partnering with companies such as Piaggio, Minarelli, Motomorini, Peugeot, Rotax and Polaris for the supply of parts including their CVT's for use in scooters, ATV's and snowmobiles.

In 2005 TGB made the decision to enter the competitive ATV market and introduced the Blade range of ATV's to the world. With an already established brand name across Europe it did not take long before the awards started to roll in. TGB's reputation for quality products quickly translated to their Blade range of ATV's and rewarded TGB with early and continued success in France, Germany

and with the 2010 ATV of the year in the Czech Republic. 2011 saw the Blade 550 become the largest selling ATV of all brands in the Czech Republic. 2013 saw yet another ATV of the year award this time in Germany.

2020 sees quality built TGB ATV's, Scooters, CVT's, Engines and other componentry sold in 40 Countries around the world.

BLADE 520



Australia, now it's our turn.

Argo ATV (Aust) are the authorised Australian Distributor for TGB and are proud to offer Australian consumers a safer ATV suited to Australian conditions. The new TGB Blade series of ATVs are built in Taiwan and fully compliant to the latest Australian ATV Standard.

TGB ATVs will be distributed throughout Australia via an ever-increasing specialised dealer network. TGB and Argo will continue to work diligently to build and educate our dealer network to be able to support you through not only the purchase of your ATV, but to be able to offer you after sales service, parts, accessories and if it happens, help with any warranty issues.

2 Years / 10,000kms Factory Warranty

BLADE 520 EPS



BLADE 600 SE



BLADE 600 SE-X



Some accessories displayed maybe optional extra

TGB BLADE ATV

Whether you need a hard working or a pure adrenaline racing quad - TGB is your go to choice. With the new T600 Sports quad and the all new Long Wheel Base 1000cc two seater, TGB have the performance breakthrough you can trust!

TGB SPORTS QUAD RANGE, FOR THOSE WHO JUST WANT A LITTLE BIT MORE!

TARGET 600 SPORTS



TARGET 600EPS



BLADE 1000 LTX



Some accessories displayed maybe optional extra



2wd/4wd Automatic Transmission with Differential Lock

Blade models are equipped with a durable, automatic CVT transmission with selectable 2wd/4wd and front differential lock.

Steel Front and Rear Racks

Heavy-duty steel front/rear racks deliver 45/75 kgs carrying capacity, with multiple tie-down locations for maximum versatility.



Suspension

Blade models feature double A-arm front and rear suspensions with extended travel for premium comfort and control in all riding conditions. The shocks are mounted to the lower A-arm to maximize performance and rider comfort. Riders can easily adjust spring preload to match their riding style and load carrying requirements.

Instrument Gauge

Digital display features odometer, speedometer, trip odometer, RPM, EPS setting, & fuel level. Surrounding the display are easy to identify indicators for transmission position, Hi-Temp, Low Battery, High Beam, Low Oil Pressure, Check Engine, 2wd/4wd and differential lock indicators.

Tyres

All TGB Quad models come standard with 6Ply tyres and ALL EPS models come standard with 14-inch Black Alloy Wheels. The 1000cc LTX is fitted with Maxxis Bighorn 2.0 Tyres - also 6-ply construction providing enhanced durability and puncture resistance along with a tread pattern enhancing predictable cornering and stability."




Electronic Power Steering

The Blade premium Tri-Mode Speed Sensitive Electronic Power Steering (TMSS EPS) senses the ATV speed to provide varying levels of assist for the most comfortable ride. Riders can conveniently select their desired level – from no assist, minimum and maximum assist – by toggling the digital display.

2-inch Receiver Hitch

A rugged automotive-style 2-inch receiver hitch features anti-vibration technology for easy towing with maximum smoothness. Towing capacity is 555kgs.

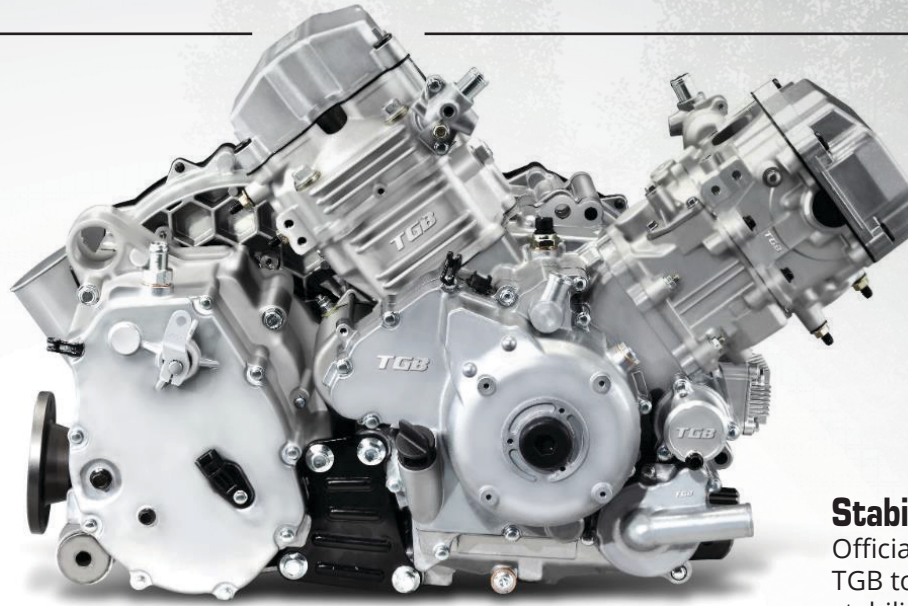

1000 Engine

The TGB 1000cc EFI - ATV engine with V-Twin Cylinders (up to 997.1cc) puts out excellent power (83h.p) and provides exhilarating acceleration. This TGB engine kit may be new to Australia but has flourished in the ATV and UTV design with tens of thousands sold Worldwide.

Stability

Official Government Testing proves the TGB to have one of the best riding stability tilt angles in it's class and coupled with the new safety OPD - that equals 'Peace of Mind'.

520 Engine

The 503cc single-cylinder SOHC 4-stroke engine is designed and built for strong performance and great durability. It features Electronic Fuel Injection and liquid-cooling (with an auxiliary fan) for optimal and consistent performance in all conditions. With class-leading torque and 39 horsepower, it's a clean, quiet engine that provides excellent fuel economy.

Hydraulic Brakes

Hydraulic disc brakes feature both hand lever and foot pedal operation, delivering enhanced braking performance in all conditions. They're complemented by smooth-action engine braking for positive rider control.





Photos for illustration purposes only

ENGINE

| | |
|--------------|------------------------|
| DISPLACEMENT | 503cc |
| TYPE | 4-stroke SOHC, 4-Valve |
| CYLINDER | Single |
| FUEL SYSTEM | EFI |
| COOLING | Liquid |
| HP | 39 |

SUSPENSION/WHEELS/TIRES

| | |
|------------------|--------------------------|
| FRONT SUSPENSION | Independent Double A-arm |
| REAR SUSPENSION | Independent Double A-arm |
| FRONT TRAVEL | 22.1 cm |
| REAR TRAVEL | 24.0 cm |
| WHEELS | Steel |
| FRONT TIRES | AT 25 X 8-12 |
| REAR TIRES | AT 25 X10-12 |

POWERTRAIN

| | |
|-------------------|------------------------|
| TRANSMISSION | V belt C.V.T Automatic |
| FINAL DRIVE | Shaft Drive |
| DRIVE SYSTEM | Selectable 2wd/4wd |
| DIFFERENTIAL LOCK | Standard |
| GEAR SELECTION | L/H/N/R |
| ENGINE BRAKING | Standard |
| FRONT BRAKE | 200mm hydraulic discs |
| REAR BRAKE | 180mm hydraulic discs |
| HAND BRAKE | All 4 Wheels |
| FOOT BRAKE | All 4 Wheels |

DIMENSIONS/WEIGHT/CAPACITY

| | |
|-----------|--------|
| LENGTH | 2120mm |
| WIDTH | 1240mm |
| HEIGHT | 1205mm |
| WHEELBASE | 1290mm |

DIMENSIONS/WEIGHT/CAPACITY - continued

| | |
|------------------|--------------|
| SEAT HEIGHT | 91.4cm |
| GROUND CLEARANCE | 30.5cm |
| TOWING CAPACITY | 555.7kg |
| DRY WEIGHT | 350kg |
| FUEL CAPACITY | 18ltr |
| SEAT CAPACITY | Single Rider |
| FRONT RACK | 45 kg |
| REAR RACK | 75 kg |

FEATURES

| | |
|------------------------|------------------------|
| POWER STEERING | NO |
| FRONT BRUSHGUARD | OPT |
| FRONT BUMPER | NO |
| REAR HITCH | Standard / 2" Receiver |
| WINCH | OPT |
| HAND GUARDS | OPT |
| ACCESSORY OUTLET | YES |
| DUAL 60W LOW/HIGH BEAM | YES |

INSTRUMENTATION

Digital instrument panel with odometer, speedmeter, Tripmeter, RPM, transmission position, fuel gauge, Hi-Temp/Low-Batt lights, high beam light, EFI checking, differential indicator, 2WD/4WD indicator

COLORS

| | |
|------------------|------------|
| AVAILABLE COLORS | Dark Green |
|------------------|------------|



Photos for illustration purposes only

ENGINE

| | |
|--------------|------------------------|
| DISPLACEMENT | 503cc |
| TYPE | 4-stroke SOHC, 4-Valve |
| CYLINDER | Single |
| FUEL SYSTEM | EFI |
| COOLING | Liquid |
| HP | 39 |

SUSPENSION/WHEELS/TIRES

| | |
|------------------|--------------------------|
| FRONT SUSPENSION | Independent Double A-arm |
| REAR SUSPENSION | Independent Double A-arm |
| FRONT TRAVEL | 22.1 cm |
| REAR TRAVEL | 24.0 cm |
| WHEELS | Aluminum |
| FRONT TIRES | 25 X 8-12 |
| REAR TIRES | 25 X 8-10 |

POWERTRAIN

| | |
|-------------------|------------------------|
| TRANSMISSION | V belt C.V.T Automatic |
| FINAL DRIVE | Shaft Drive |
| DRIVE SYSTEM | Selectable 2wd/4wd |
| DIFFERENTIAL LOCK | Standard |
| GEAR SELECTION | L/H/N/R |
| ENGINE BRAKING | Standard |
| FRONT BRAKE | 200mm hydraulic discs |
| REAR BRAKE | 180mm hydraulic discs |
| HAND BRAKE | All 4 Wheels |
| FOOT BRAKE | All 4 Wheels |

DIMENSIONS/WEIGHT/CAPACITY

| | |
|-----------|--------|
| LENGTH | 2120mm |
| WIDTH | 1240mm |
| HEIGHT | 1205mm |
| WHEELBASE | 1290mm |

DIMENSIONS/WEIGHT/CAPACITY - continued

| | |
|------------------|--------------|
| SEAT HEIGHT | 91.4cm |
| GROUND CLEARANCE | 30.5cm |
| TOWING CAPACITY | 555.7kg |
| DRY WEIGHT | 350kg |
| FUEL CAPACITY | 18ltr |
| SEAT CAPACITY | Single Rider |
| FRONT RACK | 45 kg |
| REAR RACK | 75 kg |

FEATURES

| | |
|------------------------|------------------------|
| POWER STEERING | YES |
| FRONT BRUSHGUARD | OPT |
| FRONT BUMPER | YES |
| REAR HITCH | Standard / 2" Receiver |
| WINCH | OPT |
| HAND GUARDS | OPT |
| ACCESSORY OUTLET | YES |
| DUAL 60W LOW/HIGH BEAM | YES |

INSTRUMENTATION

Digital instrument panel with odometer, speedmeter, Tripmeter, RPM, transmission position, fuel gauge, Hi-Temp/Low-Batt lights, high beam light, EFI checking, differential indicator, 2WD/4WD indicator, EPS Indicator

COLORS

| | |
|------------------|------------|
| AVAILABLE COLORS | Red / Grey |
|------------------|------------|



Photos for illustration purposes only

ENGINE

| | |
|--------------|------------------------|
| DISPLACEMENT | 561 cc |
| TYPE | 4-stroke SOHC, 4-Valve |
| CYLINDER | Single |
| FUEL SYSTEM | EFI |
| COOLING | Liquid |
| HP | 42.1 |

SUSPENSION/WHEELS/TIRES

| | |
|------------------|--------------------------|
| FRONT SUSPENSION | Independent Double A-arm |
| REAR SUSPENSION | Independent Double A-arm |
| FRONT TRAVEL | 22.1 cm |
| REAR TRAVEL | 24.0 cm |
| WHEELS | Steel Matt Black 12" |
| FRONT TIRES | AT 25 X 8-12 |
| REAR TIRES | AT 25 X 10-12 |

POWERTRAIN

| | |
|-------------------|------------------------|
| TRANSMISSION | V belt C.V.T Automatic |
| FINAL DRIVE | Shaft Drive |
| DRIVE SYSTEM | Selectable 2wd/4wd |
| DIFFERENTIAL LOCK | Standard |
| GEAR SELECTION | L/H/N/R/P |
| ENGINE BRAKING | Standard |
| FRONT BRAKE | 200mm hydraulic discs |
| REAR BRAKE | 180mm hydraulic discs |
| HAND BRAKE | All 4 Wheels |
| FOOT BRAKE | All 4 Wheels |

DIMENSIONS/WEIGHT/CAPACITY

| | |
|-----------|--------|
| LENGTH | 2120mm |
| WIDTH | 1240mm |
| HEIGHT | 1280mm |
| WHEELBASE | 1290mm |

DIMENSIONS/WEIGHT/CAPACITY - continued

| | |
|------------------|--------------|
| SEAT HEIGHT | 91.4cm |
| GROUND CLEARANCE | 32cm |
| TOWING CAPACITY | 555.7kg |
| DRY WEIGHT | 387kg |
| FUEL CAPACITY | 18ltr |
| SEAT CAPACITY | Single Rider |
| FRONT RACK | 45 kg |
| REAR RACK | 75 kg |

FEATURES

| | |
|---------------------|------------------------|
| POWER STEERING | NO |
| FRONT BRUSHGUARD | OPT |
| FRONT BAR | YES |
| REAR HITCH | Standard / 2" Receiver |
| WINCH | OPT |
| HAND GUARDS | OPT |
| ACCESSORY OUTLET | YES |
| FULL LED HEADLIGHTS | YES |

INSTRUMENTATION

Digital instrument panel with odometer, speedmeter, Tripmeter, RPM, transmission position, fuel gauge, Hi-Temp/Low-Batt lights, high beam light, EFI checking, differential indicator, 2WD/4WD indicator, EPS Indicator

COLORS

| | |
|------------------|------|
| AVAILABLE COLORS | Grey |
|------------------|------|



Photos for illustration purposes only

ENGINE

| | |
|--------------|------------------------|
| DISPLACEMENT | 561 cc |
| TYPE | 4-stroke SOHC, 4-Valve |
| CYLINDER | Single |
| FUEL SYSTEM | EFI |
| COOLING | Liquid |
| HP | 42.1 |

SUSPENSION/WHEELS/TIRES

| | |
|------------------|--------------------------|
| FRONT SUSPENSION | Independent Double A-arm |
| REAR SUSPENSION | Independent Double A-arm |
| FRONT TRAVEL | 22.1 cm |
| REAR TRAVEL | 24.0 cm |
| WHEELS | Matt Black Aluminium |
| FRONT TIRES | AT 25 X 8-12 |
| REAR TIRES | AT 25 X 10-12 |

POWERTRAIN

| | |
|-------------------|------------------------|
| TRANSMISSION | V belt C.V.T Automatic |
| FINAL DRIVE | Shaft Drive |
| DRIVE SYSTEM | Selectable 2wd/4wd |
| DIFFERENTIAL LOCK | Standard |
| GEAR SELECTION | L/H/N/R/P |
| ENGINE BRAKING | Standard |
| FRONT BRAKE | 200mm hydraulic discs |
| REAR BRAKE | 180mm hydraulic discs |
| HAND BRAKE | All 4 Wheels |
| FOOT BRAKE | All 4 Wheels |

DIMENSIONS/WEIGHT/CAPACITY

| | |
|-----------|--------|
| LENGTH | 2120mm |
| WIDTH | 1240mm |
| HEIGHT | 1280mm |
| WHEELBASE | 1290mm |

DIMENSIONS/WEIGHT/CAPACITY - continued

| | |
|------------------|--------------|
| SEAT HEIGHT | 91.4cm |
| GROUND CLEARANCE | 32cm |
| TOWING CAPACITY | 555.7kg |
| DRY WEIGHT | 393kg |
| FUEL CAPACITY | 18ltr |
| SEAT CAPACITY | Single Rider |
| FRONT RACK | 45 kg |
| REAR RACK | 75 kg |

FEATURES

| | |
|---------------------|------------------------|
| POWER STEERING | YES |
| FRONT BRUSHGUARD | OPT |
| FRONT BUMPER | YES |
| REAR HITCH | Standard / 2" Receiver |
| WINCH | OPT |
| HAND GUARDS | OPT |
| ACCESSORY OUTLET | YES |
| FULL LED HEADLIGHTS | YES |

INSTRUMENTATION

Digital instrument panel with odometer, speedmeter, Tripmeter, RPM, transmission position, fuel gauge, Hi-Temp/Low-Batt lights, high beam light, EFI checking, differential indicator, 2WD/4WD indicator, EPS Indicator

COLORS

| | |
|------------------|------------|
| AVAILABLE COLORS | Candy Blue |
|------------------|------------|



Photos for illustration purposes only

ENGINE

| | |
|--------------|------------------------|
| DISPLACEMENT | 561 cc |
| TYPE | 4-stroke SOHC, 4-Valve |
| CYLINDER | Single |
| FUEL SYSTEM | EFI |
| COOLING | Liquid |
| HP | 44.8 |

SUSPENSION/WHEELS/TIRES

| | |
|------------------|--------------------------|
| FRONT SUSPENSION | Independent Double A-arm |
| REAR SUSPENSION | Independent Double A-arm |
| FRONT TRAVEL | 22.1 cm |
| REAR TRAVEL | 24.0 cm |
| WHEELS | Matt Black Aluminium |
| FRONT TIRES | AT 25 X 8-12 |
| REAR TIRES | AT 25 X 10-12 |

POWERTRAIN

| | |
|-------------------|------------------------|
| TRANSMISSION | V belt C.V.T Automatic |
| FINAL DRIVE | Shaft Drive |
| DRIVE SYSTEM | Selectable 2wd/4wd |
| DIFFERENTIAL LOCK | Standard |
| GEAR SELECTION | L/H/N/R/P |
| ENGINE BRAKING | Standard |
| FRONT BRAKE | 200mm hydraulic discs |
| REAR BRAKE | 180mm hydraulic discs |
| HAND BRAKE | All 4 Wheels |
| FOOT BRAKE | All 4 Wheels |

DIMENSIONS/WEIGHT/CAPACITY

| | |
|-----------|--------|
| LENGTH | 2120mm |
| WIDTH | 1240mm |
| HEIGHT | 1280mm |
| WHEELBASE | 1290mm |

DIMENSIONS/WEIGHT/CAPACITY - continued

| | |
|------------------|--------------|
| SEAT HEIGHT | 91.4cm |
| GROUND CLEARANCE | 32cm |
| TOWING CAPACITY | 555.7kg |
| DRY WEIGHT | 393kg |
| FUEL CAPACITY | 18ltr |
| SEAT CAPACITY | Single Rider |

FEATURES

| | |
|---------------------|------------------------|
| POWER STEERING | NO |
| FRONT BRUSHGUARD | OPT |
| FRONT BUMPER | YES |
| REAR HITCH | Standard / 2" Receiver |
| WINCH | OPT |
| HAND GUARDS | OPT |
| ACCESSORY OUTLET | YES |
| FULL LED HEADLIGHTS | YES |

INSTRUMENTATION

Digital instrument panel with odometer, speedmeter, Tripmeter, RPM, transmission position, fuel gauge, Hi-Temp/Low-Batt lights, high beam light, EFI checking, differential indicator, 2WD/4WD indicator, EPS Indicator

COLORS

| | |
|------------------|-------|
| AVAILABLE COLORS | White |
|------------------|-------|



Photos for illustration purposes only

ENGINE

| | |
|--------------|------------------------|
| DISPLACEMENT | 561 cc |
| TYPE | 4-stroke SOHC, 4-Valve |
| CYLINDER | Single |
| FUEL SYSTEM | EFI |
| COOLING | Liquid |
| HP | 44.8 |

SUSPENSION/WHEELS/TIRES

| | |
|------------------|--------------------------|
| FRONT SUSPENSION | Independent Double A-arm |
| REAR SUSPENSION | Independent Double A-arm |
| FRONT TRAVEL | 22.1 cm |
| REAR TRAVEL | 24.0 cm |
| WHEELS | Matt Black Aluminium |
| FRONT TIRES | AT 25 X 8-12 |
| REAR TIRES | AT 25 X 10-12 |

POWERTRAIN

| | |
|-------------------|------------------------|
| TRANSMISSION | V belt C.V.T Automatic |
| FINAL DRIVE | Shaft Drive |
| DRIVE SYSTEM | Selectable 2wd/4wd |
| DIFFERENTIAL LOCK | Standard |
| GEAR SELECTION | L/H/N/R/P |
| ENGINE BRAKING | Standard |
| FRONT BRAKE | 200mm hydraulic discs |
| REAR BRAKE | 180mm hydraulic discs |
| HAND BRAKE | All 4 Wheels |
| FOOT BRAKE | All 4 Wheels |

DIMENSIONS/WEIGHT/CAPACITY

| | |
|-----------|--------|
| LENGTH | 2120mm |
| WIDTH | 1240mm |
| HEIGHT | 1280mm |
| WHEELBASE | 1290mm |

DIMENSIONS/WEIGHT/CAPACITY - continued

| | |
|------------------|--------------|
| SEAT HEIGHT | 91.4cm |
| GROUND CLEARANCE | 32cm |
| TOWING CAPACITY | 555.7kg |
| DRY WEIGHT | 393kg |
| FUEL CAPACITY | 18ltr |
| SEAT CAPACITY | Single Rider |

FEATURES

| | |
|---------------------|------------------------|
| POWER STEERING | YES |
| FRONT BRUSHGUARD | OPT |
| FRONT BUMPER | YES |
| REAR HITCH | Standard / 2" Receiver |
| WINCH | YES |
| HAND GUARDS | OPT |
| ACCESSORY OUTLET | YES |
| FULL LED HEADLIGHTS | YES |

INSTRUMENTATION

Digital instrument panel with odometer, speedmeter, Tripmeter, RPM, transmission position, fuel gauge, Hi-Temp/Low-Batt lights, high beam light, EFI checking, differential indicator, 2WD/4WD indicator, EPS Indicator

COLORS

| | |
|------------------|-------|
| AVAILABLE COLORS | Black |
|------------------|-------|



Photos for illustration purposes only

ENGINE

| | |
|--------------|------------------------|
| DISPLACEMENT | 997cc |
| TYPE | 4-stroke SOHC, 4-Valve |
| CYLINDER | 4-stroke V-Twin |
| FUEL SYSTEM | EFI |
| COOLING | Liquid |
| HP | 86 |

SUSPENSION/WHEELS/TIRES

| | |
|------------------|--------------------------------------|
| FRONT SUSPENSION | Independent Double A-arm |
| REAR SUSPENSION | Independent Double A-arm |
| FRONT SHOCKS | EVO Hydraulic 2200mm |
| REAR SHOCKS | EVO Hydraulic 2400mm |
| WHEELS | Matt Black Aluminium |
| FRONT TIRES | Maxxis Bighorn 2.0 26 x 9-14 (6ply) |
| REAR TIRES | Maxxis Bighorn 2.0 26 x 11-14 (6ply) |

POWERTRAIN

| | |
|-------------------|----------------------------|
| TRANSMISSION | V belt C.V.T Automatic |
| FINAL DRIVE | 4x4 Shaft Drive |
| DRIVE SYSTEM | Selectable 2wd/4wd |
| DIFFERENTIAL LOCK | Standard |
| GEAR SELECTION | L/H/N/R/P |
| ENGINE BRAKING | Standard |
| FRONT BRAKE | 230mm Dual Hydraulic Discs |
| REAR BRAKE | 210mm Dual Hydraulic Discs |
| HAND BRAKE | All 4 Wheels |
| FOOT BRAKE | All 4 Wheels |

DIMENSIONS/WEIGHT/CAPACITY

| | |
|-----------|--------|
| LENGTH | 2340mm |
| WIDTH | 1255mm |
| HEIGHT | 1340mm |
| WHEELBASE | 1455mm |

DIMENSIONS/WEIGHT/CAPACITY - continued

| | |
|------------------|-------------|
| SEAT HEIGHT | 91.4cm |
| GROUND CLEARANCE | 32cm |
| TOWING CAPACITY | 555.7kg |
| DRY WEIGHT | 440kg |
| FUEL CAPACITY | 23ltr |
| SEAT CAPACITY | Two Persons |
| FRONT RACK | 45 kg |
| REAR RACK | 75 kg |

FEATURES

| | |
|---------------------|------------------------|
| POWER STEERING | YES |
| FRONT BRUSHGUARD | OPT |
| FRONT BUMPER | YES |
| REAR HITCH | Standard / 2" Receiver |
| WINCH | YES |
| HAND GUARDS | YES |
| ACCESSORY OUTLET | YES |
| FULL LED HEADLIGHTS | YES |

INSTRUMENTATION

Digital instrument panel with odometer, speedmeter, Tripmeter, RPM, transmission position, fuel gauge, Hi-Temp/Low-Batt lights, high beam light, EFI checking, differential indicator, 2WD/4WD indicator, EPS Indicator

COLORS

| | |
|------------------|-------------|
| AVAILABLE COLORS | Matte Black |
|------------------|-------------|



TGB

Work and Play Different



www.TGBatv.com.au



www.TGBatv.com.au

2023 Australian Brochure

Some vehicle applications shown maybe for demonstration purposes, possibly even originating from third parties and not available from ARGO or TGB. All care has been taken to proof the accuracy of the dimensions and capacities however please confirm the manufacturers handbook and specifications before relying on information within this brochure.

ATVs can be hazardous to operate. Improper use can cause severe injury or death. Riders must wear an approved helmet, eye protection and protective clothing. Each rider must read and understand the operator's manual before riding. Follow all instructions and warnings. Avoid abrupt manoeuvres, paved surfaces, hard acceleration when turning, and side hilling; slow down before entering a turn. Never engage in stunt driving. Avoid excessive speeds and be particularly careful on difficult terrain. Never carry a passenger on a single-rider ATV. These ATVs are recommended only for users over 16 years old. Never operate on public roads. ATVs and XTVs are designated for off-highway vehicle access only — collisions with cars and trucks can occur. Never drive or ride under the influence of alcohol or drugs. Do not shoot from or lean firearms or bows against the ATV. ARGO and TGB recommend that all riders attend a practical ATV training course or at least an online training to improve riders understanding of their ATV.

For more information go to <http://atvsafety.com.au/safety/training>. For safety or training information in Australia www.atvsafety.com.au. Along with concerned conservationists everywhere, TGB urges you to respect public and private lands. Ride only on designated areas or trails. Preserve your future riding opportunities by showing respect for the environment, local laws and the rights of others when riding. All materials and specifications are subject to change without notice. All specifications, claims and information contained within are based on current knowledge and readily available printed material as at 1st November 2022.